


159.00 EUR
 incl. 19% VAT, plus [shipping](#)

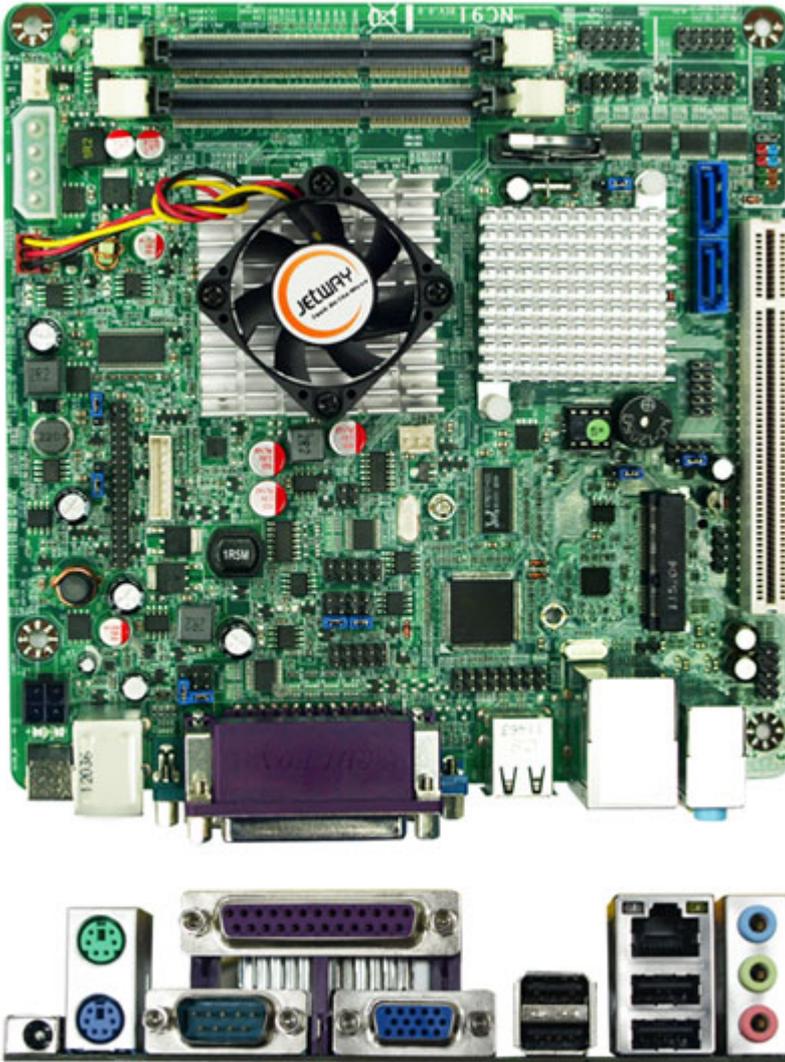

Support: [Specifications](#)

- Intel Atom D525 + NM10 Chipset
- Support INTEL® Atom Dual-Core D525 CPU
- Support 2 * 3Gb/s SATA
- Support 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB
- Supports 1 * Gigabit LAN
- Support 6 * COM ports (COM2 for RS232/422/485)
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- Support Watchdog Technology
- Support CPU Smart FAN
- Mini-ITX Form Factor(170mm x 170mm)

CPU	• INTEL ® Atom Dual-Core Processor D525 (45nm,1.80GHZ,1024MB L2 Cache)
Chipset	• INTEL® Atom D525 + NM10
Memory	• 2 * DDR3 800MHz Single CH SO-DIMM up to 4GB
Expansion Slots	• 1 * PCI slot, 1 * Mini PCI-E socket
Storage	• 2 * Serial ATA2 3Gb/s connectors
Audio	• Realtek ALC662 6-Channel HD Audio CODEC
Ethernet LAN	• 1 * Realtek RTL8111EVL Gigabit LAN
LVDS	• Onboard 24-bit single channel LVDS connector
USB	• Embedded 7 * USB 2.0/1.1

• Rear Panel I/O	<ul style="list-style-type: none"> • 4 * USB 2.0/1.1 ports • 1 * PS/2 Mouse & Keyboard connector • 1 * RJ-45 port • 3 * Audio I/O ports (Line-in, Mic and Line-out) • 1 * VGA port • 1 * COM port • 1 * Parallel port • 1 * 12V DC-in jack
• Internal I/O	<ul style="list-style-type: none"> • 3 USB 2.0 ports • 3 * NB / Chassis Fan connectors; • 1 * 24-pin ATX Power connector • 1 * LVDS header/ 1* CD IN /1 * GPIO • 1 * AUDIO header • 5 * COM headers (COM2 for RS232/RS422/RS485)
• BIOS	• AMI 8MB DIP Flash ROM
• Functional	• ATM, KIOSK, POS Machine, Digital Signage, General Application
• Packing	• Color Box Dimension ■200(W) x 200(D) x 70(H)mm
• Certificate	• CE, FCC, RoHS
• Temperature	<ul style="list-style-type: none"> • Operating within 0~40 centigrade • Storage within -20-85 centigrade
• Form Factor	• Mini ITX Form Factor(17cmx17cm)