


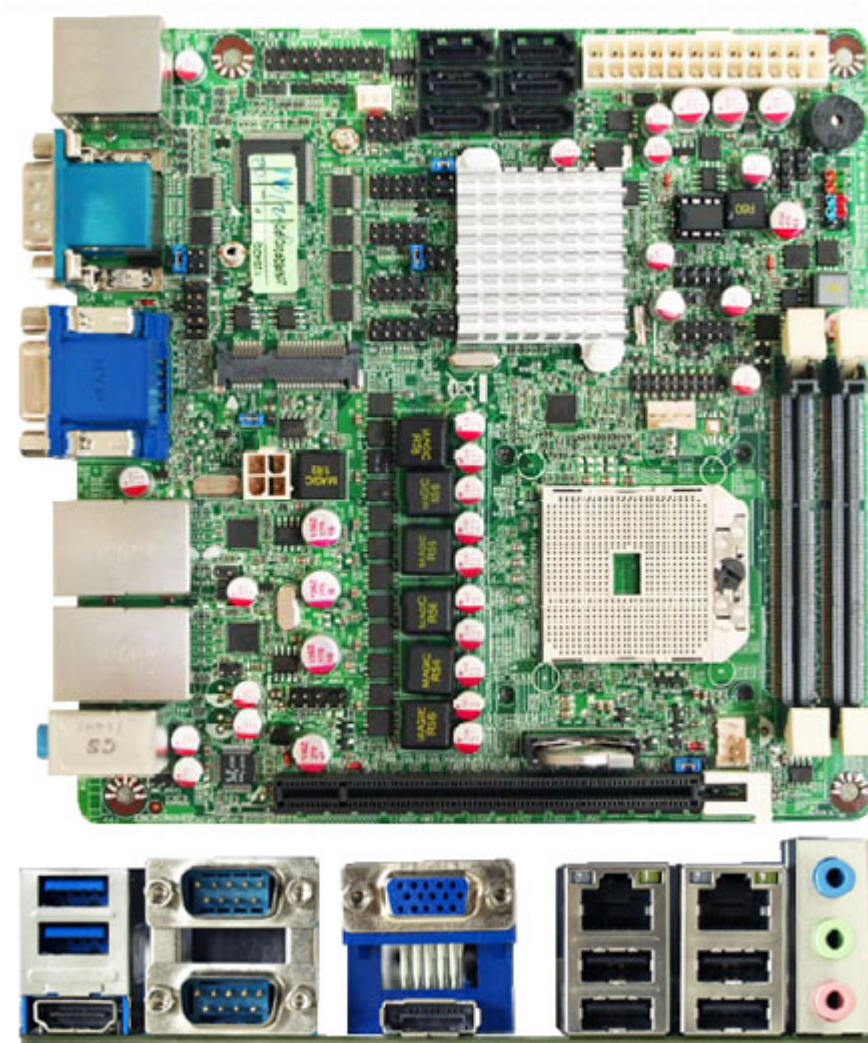

199.00 EUR  
incl. 19% VAT, plus [shipping](#)

**Support:**  [Specifications](#)

Compatible CPUs a.o. : R-464L, R-460H, R-272F, R-268D, R-460L, R-452L, R260H, R-252F

- AMD eTrinity Processor (FS1r2 Socket) with A75 FCH (Hudson D3) Chipset
- Support DirectX 11 3D Graphics Acceleration
- Support 6 \* Serial ATA3 (6Gb/s) Devices with RAID 0, 1 & 10
- Support SO-DIMM DDR3 1600 Dual Channel up to 16GB
- Integrated Realtek ALC662 HD Audio CODEC with 6-CH
- Support DP & HDMI Output
- Supports 2 \* Realtek RT8111EVL Gigabit LAN
- Support CPU Smart FAN
- Mini-ITX Form Factor(170mm x 170mm)

|                 |                                                                             |
|-----------------|-----------------------------------------------------------------------------|
| CPU             | Support AMD eTrinity Processor (FS1r2 Socket)                               |
| Chipset         | AMD A75 FCH Hudson D3 Chipset                                               |
| Memory          | 2 * SODIMM Sockets for un-buffered Dual Channel DDR3 1600 SDRAM up to 16 GB |
| Expansion Slots | 1 * PCI x 16 slot<br>1 * Mini PCI-E                                         |
| Storage         | 6 * Serial ATA3 6Gb/s connectors support RAID 0, 1 & 10functions            |
| Audio           | Realtek ALC662 6-Channel HD Audio CODEC                                     |
| Ethernet LAN    | 2 * Realtek RTL8111EVL PCI-E LAN chip for Gigabit LAN                       |
| USB             | Embedded 4 * USB 3.0 & 8 * USB 2.0/1.1                                      |

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • Rear Panel I / O | <ul style="list-style-type: none"> <li>• 2 * USB 3.0 &amp; 4 * USB 2.0/1.1 ports</li> <li>• 2 * RJ-45 ports</li> <li>• 1 * Audio I / O port</li> <li>• 1 * VGA port</li> <li>• 1 * DP port</li> <li>• 1 * HDMI port</li> <li>• 2 * COM ports</li> </ul>                                                                                                                                                                                                             |
| • Internal I / O   | <ul style="list-style-type: none"> <li>• 2 * USB 3.0 &amp; 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports</li> <li>• 1 * KB/MS header</li> <li>• CPU / Chipset / Chassis Fan connectors</li> <li>• 1 * GPIO header</li> <li>• 1 * 24-pin &amp; 4-pin 12V ATX Power connector</li> <li>• 1 * TPM 1.2 header</li> <li>• 4 * COM header (COM6 for RS232/422/485)</li> <li>• 1 * CIR header</li> <li>• 1 * AUDIO header</li> <li>• 1 * Chassis Intrusion header</li> </ul> |
| • BIOS             | • AMI EFI 64MB SPI Flash ROM                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| • Certificate      | • CE,FCC,RoHS,EuP                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| • Functional       | • Digital Signage, Gaming Machine, POS Machine                                                                                                                                                                                                                                                                                                                                                                                                                      |
| • Temperature      | <ul style="list-style-type: none"> <li>• Operating within 0~50 centigrade</li> <li>• Storage within -20-85 centigrade</li> </ul>                                                                                                                                                                                                                                                                                                                                    |
| • Form Factor      | • Mini ITX Form Factor(170mmx170mm)                                                                                                                                                                                                                                                                                                                                                                                                                                 |