




79.95 EUR
incl. 19% VAT, plus [shipping](#)

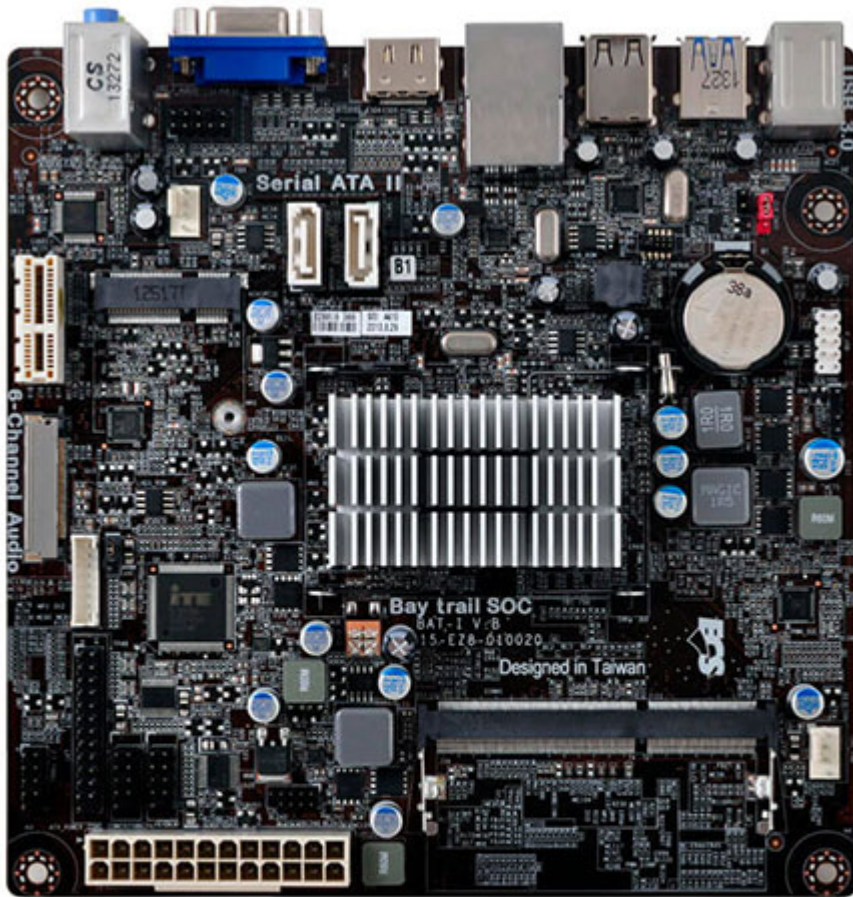

- Applied Solid Capacitor for CPU VRM to ensure a longer lifespan for system
- ECS Durathon Technology ensure the stability, reliability and performance of system.
- Dual Display design for multiple output support
- Integrated Printer (LPT) port / header to expand functionality
- Microsoft Windows 8 Certified
- Intel ® VRD 12 Ready
- Supports DirectX® 11 to enhance graphical performance
- Supports HDMI 1.4a Technology (resolution up to 1920X1200) and HDCP function
- Free Bundle: CyberLink Media Suite

Supports Intel® CNVi

Onboard Intel® Bay Trail
processors
On-Board CPU Intel ® Bay
Trail J1900 processor
VRD 12.0
Solid Capacitor for CPU
side
Supports Intel®
Hyper-Threading
Technology

CPU

GRAPHICS	Supports DirectX® 11
	Supports Full HD 1080P
	Blu-ray / HD-DVD
	Playback
MEMORY	Single-channel DDR3
	Memory architecture
	1 X DDR3 SO-DIMM
	socket
EXPANSION SLOT	Support up to 8 GB
	1 X PCI Express X 1 Gen 2.0slot(s)
	1 X Mini PCI Express X1 slot(s) for Wi-Fi /Bluetooth modules
	2 X Serial ATAIII 3Gb/s
Storage	6-Channel HD audio
	CODEC Realtek ALC662
	Realtek ALC662 6-channel
	High Definition audio
Audio	CODEC
	Meets performance
	requirements for Microsoft
	WLP 3.08 Vista premium
LAN	and mobile PCs
	Six channel DAC supports
	16/20/24-bit PCM format
	for 5.1 channel audio
USB	solution
	Emulation of 26 sound
	environments to enhance
	gaming experience
REAR PANEL I/O	Voice Cancellation and
	Key Shifting in Karaoke
	mode
	Compatible with Direct
REAR PANEL I/O	Sound 3D™, A3D™,
	I3DL2
	Realtek RTL8111G
	Gigabit Fast Ethernet
REAR PANEL I/O	Controller
	1 X USB3.1 Gen1 port(s) up to 5Gb/s
	6 X USB2.0 port(s) Up to 480 Mb/s (Back Panel 4 port(s), Onboard 2 port(s))
	1 X PS/2 Keyboard & PS/2
REAR PANEL I/O	mouse connectors
	1 X Audio port (Line
	Out/Line In/Mic In)
	1 X RJ-45 port
REAR PANEL I/O	1 X HDMI port(s)
	1 X D-Sub (VGA) port(s)
	1 X USB3.1 Gen1 port(s)
	4 X USB2.0 port(s)

	1 X 4-pin CPU_FAN connector with smart fan
	1 X 4-pin SYS_FAN connector with smart fan
	1 X Front Panel MIC/Speaker out header
	1 X Front Panel switch/LED header
CONNECTORS & HEADERS	1 X USB 2.0 header (Support additional 2 USB ports)
	2 X SATA II 3Gb/s connector(s)
	1 X CLR_CMOS header
	2 X Serial port header (COM)
	1 X Parallel port header (LPT)
	1 X LVDS connector (optional)
	AMI BIOS with 8 MB SPI Flash ROM
	Supports ACPI 5.0 & DMI
SYSTEM BIOS	Dual Display
	Plug and Play, STR (S3) / STD (S4) , Hardware
	monitor, Multi Boot
	Multi-Language BIOS
	Audio, LAN, can be disabled in BIOS
	Dual-Monitor function
FORM FACTOR	Mini ITX Form Factor
	170*170
OS Support	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 64-bit
	Windows 10 32-bit
Certifications	CE/FCC Certification
	ErP/EuP Certification
	WHQL Certification
	WHCK Certification