

Assembling CarTFT QBOX

Remove all of the screws from the case





Push the cover of the enclosure backwards to the rear





Remove the Mainboard









Hold the enclosure with one hand and remove the mainboard with you other hand upwards.
(ATTENTION: straight upwards, not slant, because you will maybe damage the pins.)



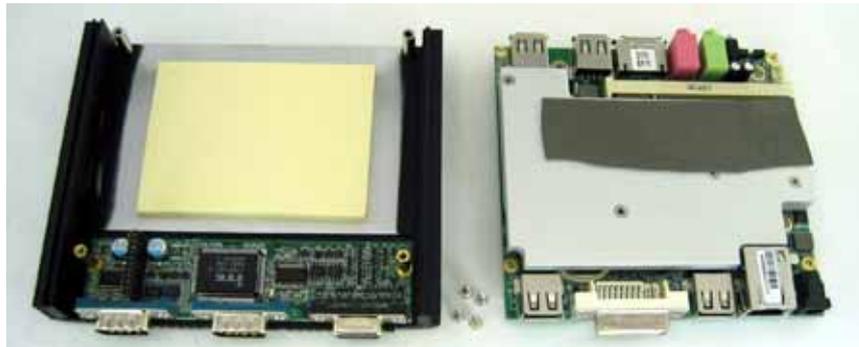

To change the RAM, remove the following screws.
(If you only want to put in the Harddrive, please go on to the next step.)

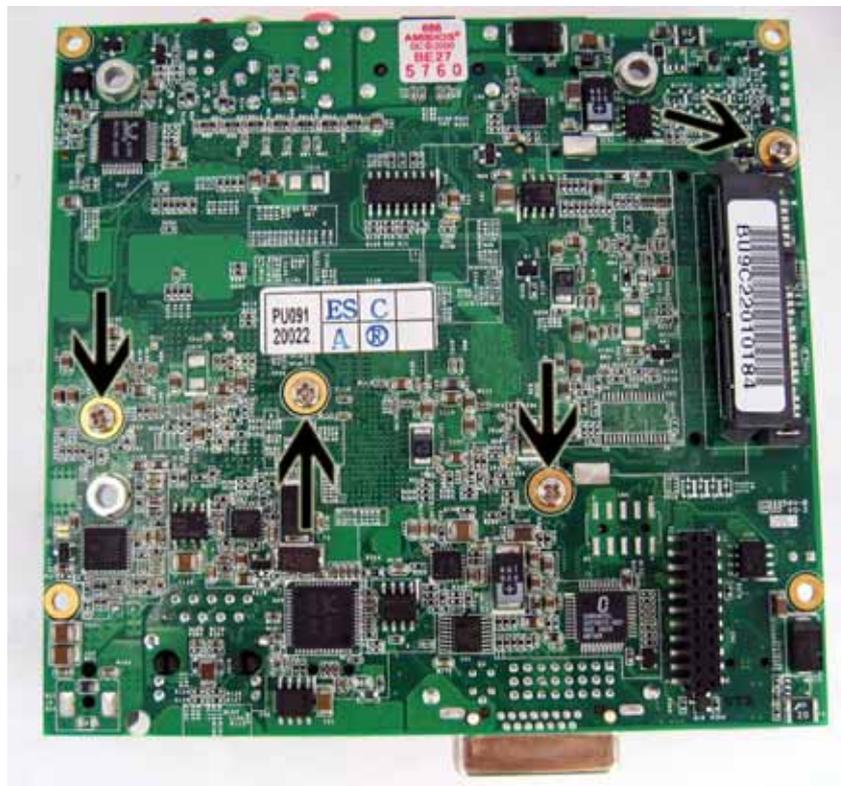

Please remove the cooling unit and set it apart for a while



To change the RAM, push the fixing clips, gently, aside



Now, you can change the RAM to the new one.



Place the RAM to the slot in push it down till the RAM is engaged.
After that, bring the cooling unit back on the System and fix it.



Now, if the cooling unit is fixed, you can place the SATA Harddrive on the right place and engage it too.



Screw the Harddrive




CARTFT.COM


Shop for mobile
PC- and GPS-Solutions

Power Up Your Car



Now, you can bring up again the mainboard.
Please be careful, you should not damage the pins.
If the mainboard is set on the right position, press it down, till you not see the pins any longer.
Now the mainboard can be screwed.

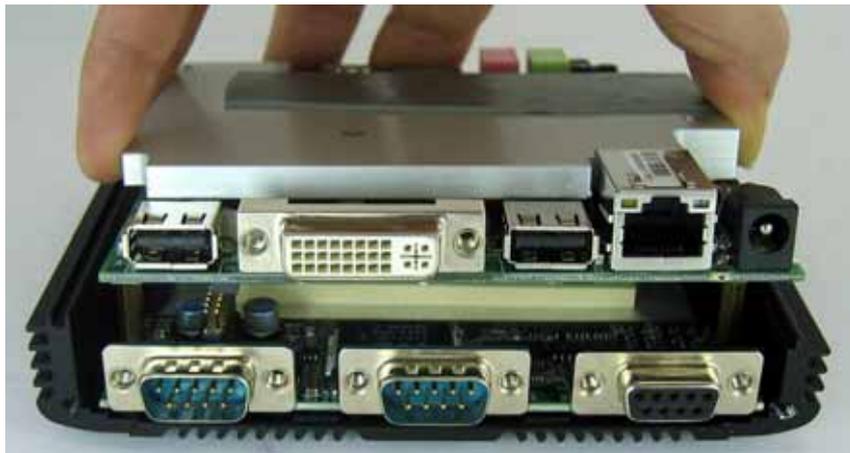

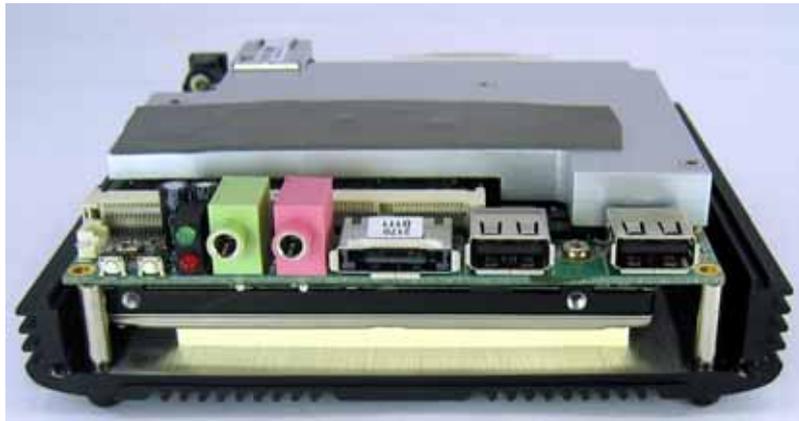

Set up the Cover of the enclosure back on the top (there is only one possible way), bring the slot plate back on the right position and fix all of the screws.





FINISHED